

SUB 708-AS MK3

ACTIVE SUBWOOFER



Description

The SUB 708-AS mk3 is a portable 18" high-power active subwoofer for live sound applications. It features a state-of-the-art transducer with a high-power ceramic magnetic circuit and a powerful Class-D amplifier that delivers sound pressure levels up to 133 dB with exceptional headroom. Designed as the ideal complement for 8" or 10" loudspeakers, it provides outstanding performance in any application. Rear panel controls include volume, EQ, polarity, and crossover frequency selection. The rugged all-wood cabinet with scratch-resistant polyurea coating makes it durable, easy to carry and install securely. With its versatility, sound quality, and high power output, the SUB 708-AS MK3 is perfect for small to mid-sized venues and portable applications.

Features

- > 1400 Watt Class-D Amplifier
- > 18" Woofer, bass reflex housing
- > Stereo Crossover
- > Switchable Crossover Frequencies
- > Polarity-reverse switch
- > Electronic equalization, soft limiter and protection
- > Stereo XLR input, Stereo XLR signal output
- > Bass Motion Control excursion management

Part Number

13000809 SUB 708-AS MK3 13000810 SUB 708-AS MK3 220-240 V Black 100-120 V Black EAN 8024530020491 EAN 8024530021368


Technical Specifications Page 1 of 2



SUB 708-AS MK3

ACTIVE SUBWOOFER

Line Art 2D

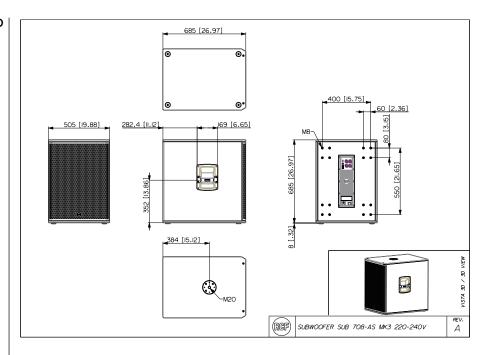

TECHNICAL SPECIFICATIONS

Acoustical specifications Frequency Response 35 Hz ÷ 120 Hz

Max SPL @ 1m 133 dB

Transducers Woofer 1 x 18", 3.0" v.c

Input/Output sectionInput signalbal/unbalInput connectorsXLR

Output connectors XLR

Input sensitivity -2 dBu/+4 dBu

Processor section Hi-Pass Frequencies 110 Hz

rocessor sectionHi-Pass Frequencies110 HzLow-Pass Frequencies80 Hz

Protections Thermal, RMS

Limiter Soft Limiter

Power section Controls Volume, EQ, Phase, Xover
1400 W Peak, 700 W RMS

Low frequencies 1400 W Peak, 700 W RMS

Cooling Convection
Connections VDE

Standard complianceSafety agencyCE compliant

Physical specifications Handles One each side

Pole mount/Cap Yes
Color Black

SizeHeight693 mm / 27.28 inchesWidth505 mm / 19.88 inches

 Width
 505 mm / 19.88 inches

 Depth
 685 mm / 26.97 inches

 Weight
 40.6 kg / 89.51 lbs

ACCESSORIES

 Protections
 CVR 003
 13360530
 8024530020422

 Rigging / Mounting
 PM-KIT M20
 13360067
 8024530014599

 Transportation
 WH PRO 4X
 13360238
 8024530018320

Technical Specifications Page 2 of 2