



# ART 735-A MK5

ACTIVE TWO-WAY SPEAKER



**Description** ART 735-A MK5 is a unique product in its category. The 3,0" compression driver offers unique vocal clarity and sound projection. The 15" woofer offers an extremely linear response and a precise, deep low frequency control. The transducers are produced using the most advanced assembly technologies. The amplifier delivers 1400 watts and is controlled by a DSP that takes care of crossover, equalisation, phase control, soft limiting and speaker protections.

- Features**
- › 132 dB Max SPL
  - › 1400 WATT 2-way peak power
  - › 90° x 60°, Wide dispersion constant directivity horn
  - › Innovative DSP Processing
  - › 3,0" Titanium diaphragm Compression Driver
  - › 15" Woofer
  - › FiRPHASE Technology
  - › XBOOST Low Frequencies Enhancer


<b>Part Number</b>	13000826 ART 735-A MK5	220-240 V	Black	EAN 8024530021481
	13000857 ART 735-A MK5	100-120 V	Black	EAN 8024530021559



# ART 735-A MK5

ACTIVE TWO-WAY SPEAKER

Line Art 2D

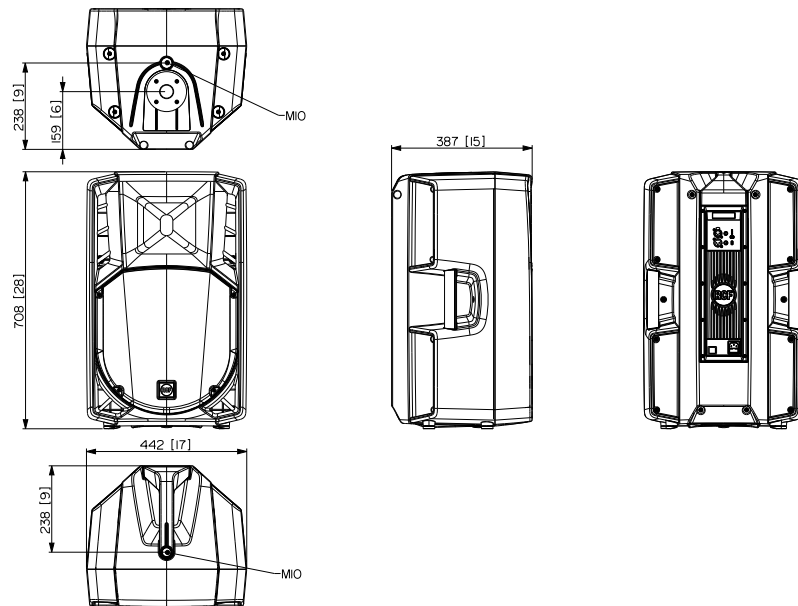

## TECHNICAL SPECIFICATIONS

<b>Acoustical specifications</b>	Frequency Response	45 Hz ÷ 20000 Hz	
	Max SPL @ 1m	132 dB	
	Horizontal coverage angle	90°	
	Vertical coverage angle	60°	
<b>Transducers</b>	Compression Driver	1 x 1.0" neo, 3.0" v.c	
	Woofer	1 x 15", 3.0" v.c	
<b>Input/Output section</b>	Input signal	bal/unbal	
	Input connectors	XLR, Jack	
	Output connectors	XLR	
	Input sensitivity	-2 dBu/+4 dBu	
	Mic. Input Sensitivity	-32 dBu	
<b>Processor section</b>	Crossover Frequencies	800	
	Protections	Thermal, RMS	
	Limiter	Soft Limiter	
<b>Power section</b>	Controls	Volume, Boost, MIC/Line	
	Total Power	1400 W Peak	
	High frequencies	400 W Peak	
	Low frequencies	1000 W Peak	
<b>Standard compliance</b>	Cooling	Convection	
	Connections	VDE	
	Safety agency	CE compliant	
	<b>Physical specifications</b>	Cabinet/Case Material	PP Composite
		Hardware	2 x M10
		Handles	1 on top, 1 each side
		Pole mount/Cap	Yes
Grille	Steel		
Color	Black		



# ART 735-A MK5

## ACTIVE TWO-WAY SPEAKER

<b>Size</b>	Height	708 mm / 27.87 inches
	Width	437 mm / 17.2 inches
	Depth	389 mm / 15.31 inches
	Weight	21.4 kg / 47.18 lbs

### ACCESSORIES

<b>Cables</b>	AC XLR 3M3F	13360102	8024530006402
<b>Protections</b>	CVR ART 725	13360115	8024530010676
<b>Rigging / Mounting</b>	AC PMX	13360232	8024530010058
	AC PRO-FS	13360109	8024530006471
	AC PRO-PM	13360110	8024530006488
	H-BR 2X ART 715	13360105	8024530012939
	PM-KIT M20	13360067	8024530014599